Herga Energy

Factory
La Estrella Industrial Estate · Calle Neptuno, N° 125
30500 Molina de Segura · Murcia · Spain


info@hergaenergy.com
+34 968 603 973 · +34 655 920 415
www.hergaenergy.com

TECHNICAL DATA SHEET

Visión Total anti-fog

Anti-fog for the bathroom mirror: step out of the shower and see yourself

Step out of the shower and see yourself

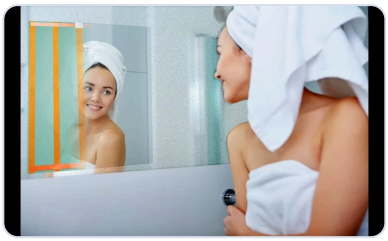

PRODUCT DESCRIPTION

The Visión Total anti-fog pad is a sheet stuck to the back of the bathroom mirror and connected to the bathroom light. When you switch the light on, the mirror warms slightly and stops misting up. It is fitted in less than a minute with its adhesive pads and uses very little power.

MAIN FEATURES

- ✔ Sheet behind the bathroom mirror
- ✔ Switches on with the bathroom light
- ✔ Fitted in less than a minute with adhesive pads
- ✔ Uses very little power

TECHNICAL DATA

What it is	Anti-fog sheet that sticks behind the mirror
Operation	Switches on and off with the bathroom light
Models	A wide choice of models: rectangular from 50 × 31 to 190 × 55 cm and round 30, 40 and 55 cm · also made to measure
Power	120 W/m²
Voltage	230 V · 120 V · 48 V · 24 V · 12 V depending on the model: choose the model or ask us
Working temperature	+12 °C above the bathroom temperature
Protection	IP65
Thickness	0.12 mm
Accessories included	Built-in adhesives: fitted in under a minute
Warranty	5 years
Made in	Molina de Segura (Murcia), Spain

AVAILABLE MODELS

Model	Size	Power	Voltage	Barcode
VT231	50 × 31 cm	19 W	230 V	8425493118810
VT242	70 × 43 cm	36 W	230 V	8425493118728
VT244	100 × 43 cm	52 W	230 V	8425493118742
VT251	55 × 55 cm	33 W	230 V	8425493118612
VT252	65 × 55 cm	42 W	230 V	8425493118629
VT253	85 × 55 cm	56 W	230 V	8425493118636
VT254	100 × 55 cm	66 W	230 V	8425493118643
VT255	140 × 55 cm	92 W	230 V	8425493118650
VT256	190 × 55 cm	125 W	230 V	8425493118667
D30	Ø 30 cm	18 W	230 V	8425493118339
D40	Ø 40 cm	38 W	230 V	8425493118346
D55	Ø 55 cm	52 W	230 V	8425493118353

INSTALLATION INSTRUCTIONS

How do I install it? In less than a minute: clean the back of the mirror, remove the protector from the adhesives, stick on the sheet and connect its wires to those of the bathroom light (the wall lights). If you do not know how to make the electrical connection, ask an electrician.

HERGA ENERGY · TECHNICAL DEPARTMENT · REVIEWED 01/11/2026

Reviewed · Technical Department
HERGA ENERGY SENAL, S.L. · CIF B73879371
Date: **01/11/2026**